



THIRD FLOOR

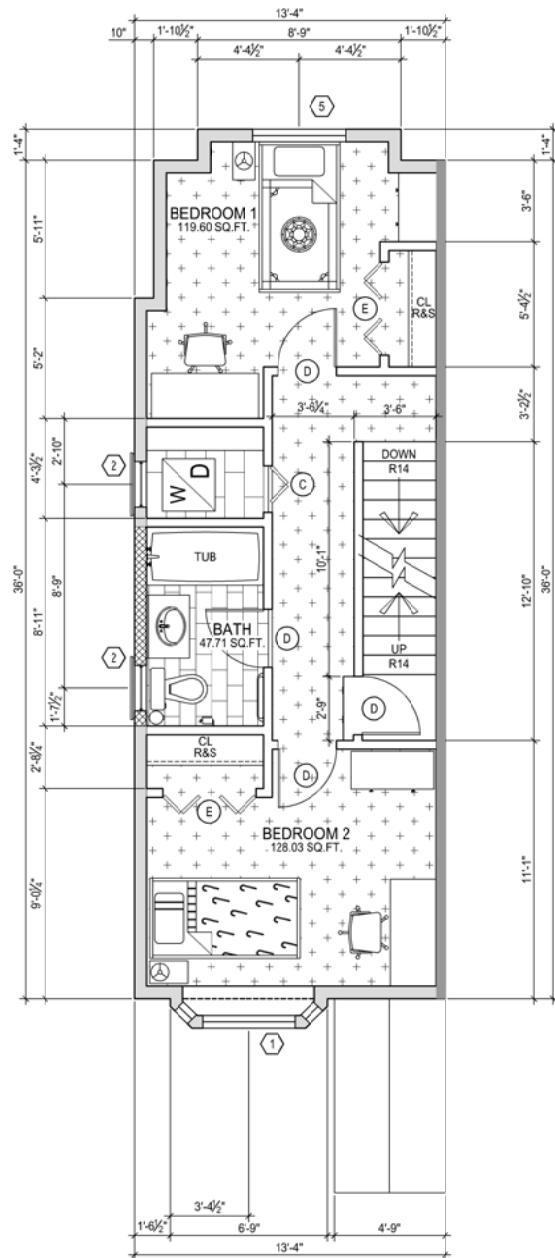

SECOND FLOOR

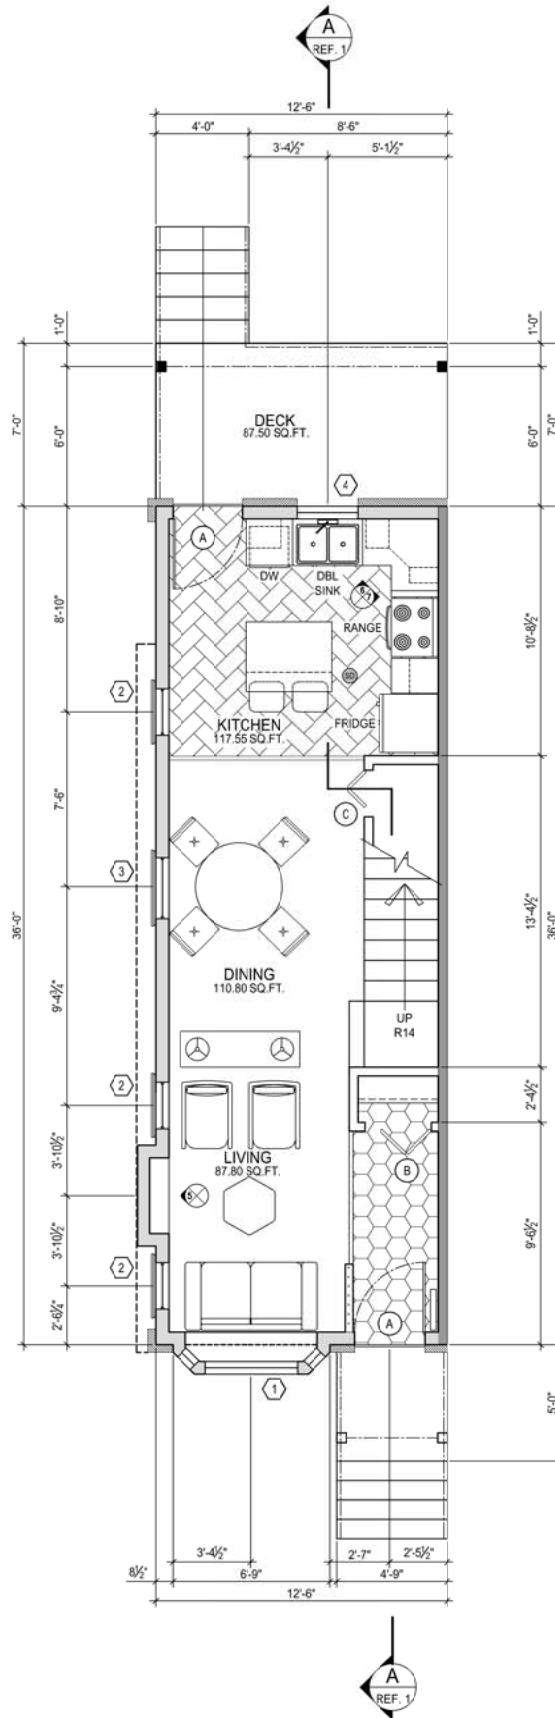

FIRST FLOOR

| WINDOW SCHEDULE |                         |                                   |     |
|-----------------|-------------------------|-----------------------------------|-----|
| TAG             | RO SIZE                 | TYPE                              | QTY |
| ①               | 6'-8-15/16" x 4'-7-1/2" | DOUBLE HUNG BAY                   | 2   |
| ②               | 2'-0" x 3'-0"           | DOUBLE HUNG, PROJECTED SILL       | 5   |
| ③               | 2'-8" x 3'-0"           | DOUBLE HUNG, PROJECTED SILL       | 1   |
| ④               | 2'-8" x 3'-0"           | DOUBLE HUNG, PROJECTED SILL       | 1   |
| ⑤               | 4'-0" x 3'-0"           | DOUBLE HUNG, PROJECTED SILL       | 2   |
| ⑥               | 1'-6" x 3'-0"           | DOUBLE HUNG, PROJECTED SILL       | 1   |
| DOOR SCHEDULE   |                         |                                   |     |
| TAG             | RO SIZE                 | TYPE                              | QTY |
| (A)             | 3'-0" x 6'-8"           | EXTERIOR ENTRANCE DOOR            | 2   |
| (B)             | 2'-10" x 6'-8"          | BI-FOLD, HOLLOW CORE              | 1   |
| (C)             | 2'-0" x 6'-8"           | BI-FOLD, HOLLOW CORE              | 2   |
| (D)             | 2'-6" x 6'-8"           | HOLLOW CORE                       | 4   |
| (E)             | 4'-0" x 6'-8"           | BI-FOLD, FOR CLOSET (2-24" UNITS) | 2   |
| (F)             | 2'-0" x 3'-6"           | BI-FOLD, HOLLOW CORE              | 1   |
| (G)             | 2'-4" x 6'-8"           | BI-FOLD, HOLLOW CORE              | 1   |
| WALL SCHEDULE   |                         |                                   |     |
|                 |                         | EXTERIOR WALL                     |     |
|                 |                         | PLUMBING WALL                     |     |
|                 |                         | BRICK VENEER                      |     |
|                 |                         | 2x4 BEARING WALL                  |     |
|                 |                         | PONY WALL                         |     |
| SYMBOLS LEGEND  |                         |                                   |     |
| SYM             | DESCRIPTION             |                                   |     |
| ■               | POINT LOAD              |                                   |     |
| ▬               | BEARING WALL            |                                   |     |
| ⊙               | SMOKE DETECTOR          |                                   |     |
| ⊙               | CEILING FAN             |                                   |     |
| □               | ELECTRIC SERVICE PANEL  |                                   |     |

E:\1277\OLIVIA-A-1277-104.DWG

| NO. | DRAWING    | REFERENCE | NO. | DATE | REVISION | APP. |
|-----|------------|-----------|-----|------|----------|------|
| 1   | A-1277-101 | SITE PLAN |     |      |          |      |

| COURSE |
|--------|
|--------|

1277 MULTI-FAMILY RESIDENCES



CAD & BIM TECHNOLOGIES

PROJECT

4 UNIT TOWNHOUSE  
UNIT A FLOOR PLANS & SCHEDULES

|       |                |             |      |
|-------|----------------|-------------|------|
| DRAWN | OLIVIA KIM     | DRAWING NO. | REV. |
| SCALE | 1/4" = 1' - 0" | A-1277-102  | P1   |
| INST. | MSD            |             |      |
| DATE  | 03/02/2018     |             |      |